

CompX **Regulator.AT**

Instruction Manual




CompX® **Regulator** **AT**

Thank you for purchasing the CompX® **Regulator** **AT**. The **Regulator** **AT** is an innovative solution for locking cabinet doors and drawers. With (3) cylinder lengths from which to choose, it can be installed on cabinet doors or drawers with a material thickness from 1/32" to 1-7/16". Powered by 2-AAA batteries (included), **Regulator** **AT** operates using a 4 to 8 digit code.

All user programming must be done using the **Regulator** -Active Track Excel spreadsheet. See <http://compX.com/regulator/activetrack>

- **Minimum System Requirement**
 - Windows7 – Excel 2007
- **USB cable required (not included) for connection to spreadsheet**
- ***Regulator* *AT* is intended for interior use only**
- **Operating Temperature: 50°F – 120°F (10°C – 48°C)**

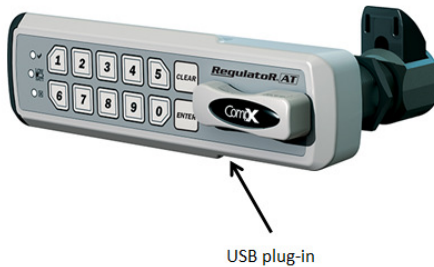

Packaged Components

CompX® **Regulator** **AT** is offered in two versions: manual lock and self-locking featuring SlamCAM. The contents of the box will vary depending on the version.

Contents – Manual Lock Version:

- *Manual lock **Regulator** **AT** Lock assembly*
- *(2) AAA alkaline batteries*
- *(1) Offset locking cam & (1) Straight locking cam*
- *FlexaCam adapters*
- *Mounting hardware*

CompX®

SECURITY PRODUCTS **Regulator** **AT**, Keyless Locking 2

CompX **Regulator** **AT**

Packaged Components cont.

Contents – Self-Lock Version:

- *Self-locking **Regulator** **AT** Lock assembly featuring SlamCAM*
- *(2) AAA alkaline batteries*
- *SlamCAM spacer discs*
- *Mounting hardware*

Powering Up and Battery Installation

CompX® **Regulator** **AT** is shipped with two installed AAA batteries. While **Regulator** **AT** features a low battery indicator, scheduled battery replacement is recommended. Mixing batteries of different chemistries could damage the **Regulator** **AT** resulting in lock failure.

To power up **Regulator** **AT**, pull the red tag. The lock is now ready for use.

Note: In the event the batteries should die, they can be replaced via the external battery compartment.

If equipped, a tamper resistant T-15 pin-in Torx® (6-lobe) bit or driver (not included) will be required to remove the battery cover.

Restoring Factory Codes

The **Regulator** -**AT** features a factory reset code which will restore the default 1-2-3-4 & 1-2-3-4-5 codes. The **Regulator** **AT** was shipped with reset stickers; one attached to the back of the **Regulator** **AT** and an extra sticker that should be kept in a safe and secure location for future reference if needed.

To restore the factory default codes, type the Factory Reset Code assigned to the **Regulator** **AT** and press and hold **ENTER** for 3 seconds.

Care and Cleaning

To clean the **Regulator** **AT** surface, apply non-acid based cleaner to a clean cotton cloth; do not spray cleaner directly on the **Regulator** **AT** Wipe down keypad and its respective housing surfaces of excess cleaner.



CompX **Regulator AT**

Operating the **Regulator AT** with Self-locking

CompX® **Regulator AT** is offered with self-locking featuring SlamCAM. If your lock is the self-locking version, follow the directions below to unlock and lock the **Regulator AT**:



To operate the standard self-locking version:

Type a valid code, press **ENTER** and rotate knob clockwise 90°, hold knob until door or drawer is open then release the knob. **Regulator AT** knob will automatically return to the locked position and the door or drawer can be closed at any time.



CompX **Regulator** **AT**

Operating the **Regulator** **AT** with Manual locking

CompX® **Regulator** **AT** is also offered in a manual locking version. If your lock is the manual locking version, follow the directions below to unlock and lock the **Regulator** **AT**.



To operate the standard manual locking version:

Type a valid code, press **ENTER** and rotate knob clockwise 90°. To lock, close the door or drawer and rotate knob 90° counterclockwise.



CompX **RegulatoR** **AT**

RegulatoR/AT Part Number Descriptions

Example: **REG-AT-S-L-3-BK**

REG-AT = RegulatoR Standard Knob w/audit trail

REGS-AT = RegulatoR Short Knob w/audit trail

Version:

S = Self-locking; featuring SlamCAM

M = Manual locking, standard CompX National cams

Mounting:

L = Left hand mount, door application - hinge on left side when facing cabinet

R = Right hand mount door application - hinge on right side when facing cabinet

V = Vertical mount door application (keypad located above locking point)

T = Top vertical mount door application (keypad located below locking point)

Cylinder Length:

1 = 7/16" cylinder length

3 = 1-3/16" cylinder length

5 = 1-3/4" cylinder length

Color:

BK = Matte black housing & knob

No suffix = Standard silver housing & knob

Replacement Parts

REG-KIT-KNOB - replacement knob kit

REG-KIT-KNOBS - replacement short knob kit

21300500000J - replacement battery door



CompX **Regulator**.AT

SlamCAM spacer discs (if so equipped) can be inserted between the lock barrel and SlamCAM mechanism to adjust the backset. See image below:




FlexaCam adaptors (if so equipped) can be attached to the cam to provide up to 12 different dimensional variations. See image below:



CompX

SECURITY PRODUCTS **Regulator**.AT, Keyless Locking 7

CompX **Regulator** **AT**

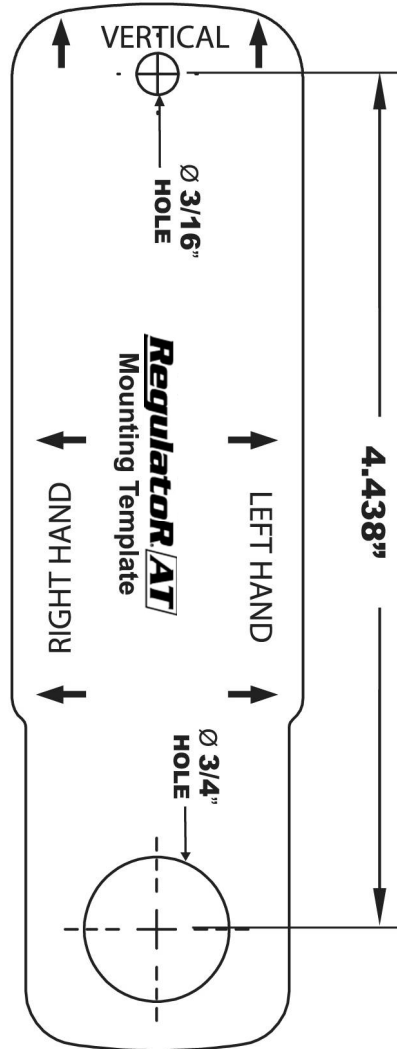

1"

NOTE: Print this page and measure the line above. It is **ONE INCH LONG**. If it measures less than or more than one inch, the template measurements also need to be scaled accordingly.

FAILURE TO DO SO COULD RESULT IN MISDRILLED HOLES.

Rev. A 11/16
PN: 334001000000

