

LOCK PLUGS FOR ALL LOCK TYPES



Part No.	Finish	KA Codes*	KD Codes	Case Quantity	Key Blank
C100LP-14A	Polished Nickel	10	200†	25	D300KY
C200LP-8	Old English	10	25**	25	D300KY
C300LP-19	Black	10	200†	25	D300KY
C400LP-20	Statuary Bronze	10	25**	25	D300KY
C500LP-3	Polished Brass	10	25**	25	D300KY
C700LP-15	Satin Nickel	10	25**	25	D300KY
C800LP	White	10	25**	25	D300KY
* Key Codes Ava	ilable: 100T, 101T, 102	T 103T 104T	105T 106T	107T 108T 10	09T

Packaged Kit of 25 Lock Plugs, One Each Keyed with Codes 110T through 134T Packaged Kit of 25 Lock Plugs, One Each Keyed with Codes 110TA - 209TA, 700TA - 799TA

Lock Features:

- Small Diameter
- High Quality/Long Life
- Solid Brass Keys
- · Coded on Face & Keys
- · Master-Keyed Standard
- Removable Lock Plug

Lock Plug **Finishes:**









Satin

Nickel



English

Black

Polished Bronze Brass

White



DOOR LOCKS



240 SERIES

290 SERIES



230 SERIES

280 SERIES

Application - Surface mounted lock for locking doors.

Operation - 180° key rotation, CCW to lock, key removable in both locked and unlocked positions.

Keying - Order lock plug separately, see page 2.

Packaging - Housing is black, toughened nylon. Cylinder is unplated. Cams are zinc plated. Case quantity 25.

Part No.	Туре	Cam Setback	Cam Extension*	Cam Throw	Case Quantity
C240CB	240	3/32"	15/16"	1/2"	25
C241CB	241	3/32"	1-3/8"	1/2"	25
C242CB	242	3/32"	2-5/8"	1/2"	25
C244CB	244	19/32"	1-1/2"	1/2"	25
C245CB	245	7/8"	1-1/2"	1/2"	25
C290CB	290	9/32"	13/16"	3/8"	25
C291CB	291	9/32"	1-1/4"	3/8"	25

* Measured from center of cylinder to tip of cam in unlocked position

Application - Surface mounted lock for locking drawers. Operation - 180° key rotation,

CCW to lock, key removable in both locked and unlocked positions. Keying - Order lock plug

separately, see page 2.

Packaging - Cylinder is black, toughened nylon. Cylinder is unplated. Cams are zinc plated. Case quantity 25.

Part No.	Туре	Cam Setback	Cam Extension*	Cam Throw	Case Quantity
C230CB	230	3/32"	15/16"	1/2"	25
C231CB	231	3/32"	1-3/8"	1/2"	25
C232CB	232	3/32"	2-5/8"	1/2"	25
C234CB	234	19/32"	1-1/2"	1/2"	25
C235CB	235	7/8"	1-1/2"	1/2"	25
C280CB	280	9/32"	13/16"	3/8"	25
C281CB	281	9/32"	1-1/4"	3/8"	25

Bore Through Style Mounts In Glass Doors Up To 3/8" Thick

Cam Setback Case Quantity

10

10

15/16"

15/16

GLASS DOOR LOCKS

Finish codes: 14A – polished nickel **3** – polished brass 15 – satin nickel

Version

Horizontal

Vertical

Compression Mount Style Mounts On Glass Door 1/4" - 5/16" Thick

	Application - Swing style doors.
	Operation - 90° rotation. CCW to lock. CCW to lock. Requires 7/8" Dia. hole bored in glass centered 7/8" from edge.
	Application - Swing style doors.
	Operation - 180° rotation. Lock slips onto edge of glass door at any location. Works with C185SP-19 strike plate (page 7).
.020.0200	Application - Double swing style doors.
132 M (1)	Operation - 180° rotation. Lock slips onto edge of glass door. Tab provides stop for opposing door. Works with C185SP-19 strike plate (page 7).
C380SG	
	Application - Sliding glass doors.
Keying - Order lock plug	Plastisol coating and felt pad eliminate rattling on glass doors. Lock plug not

separately, see page 2.

pplication - Swing style doors.	Part No.	Version	Cam Throw	Case Quantity
peration - 180° rotation. Lock slips nto edge of glass door at any cation. Works with C185SP-19	C351CB-14A; C355CB-3; C357CB-15	Horizontal Mount	1/2"	10
rike plate (page 7).	C361CB-14A; C365CB-3; C367CB-15	Vertical Mount	1/2"	10
	Double Door S	Style Mounts On G	lass Door 1/4	" - 5/16" Thick
pplication - Double swing style doors.	Part No.	Version	Cam Throw	Case Quantity
peration - 180° rotation. Lock slips to edge of glass door. Tab provides op for opposing door. Works with 185SP-19 strike plate (page 7).	C371CB-14A; C375CB-3; C377CB-15	Vertical Mount	1/2"	10
		. Ot de Merete Or		

	Sliding Glass Door Style Mounts On Glass Door 1/4" or Thinner							
	Application - Sliding glass doors.	Part No.	KA codes	KD	Case Quantity			
9	Plastisol coating and felt pad eliminate rattling on glass doors. Lock plug not removable. Master keyed to TA series.		100TA - 103TA	50	10			

Part No.

C301CB-14A; C307CB-15

C311CB-14A

C315CB-3; C317CB-15

CAM LOCK KITS C165CB, C168CB, C169CB Application - Universal type lock for either doors

1 23/32

or drawers. Each kit contains a variety of easily switched cams to accommodate most locking situations.

Operation - 90° & 180° cam rotation, CCW to lock.

Keying - Order lock plug separately, see page 2.

Packaging - Cylinder supplied with two straight and bent cams. Bent cams have setback of 15/32". Cylinder is unplated. Case quantity 25.

These Kits will Replace the Following Timberline Cam Locks:

C165CB 90° Rotat	ion		C168CB 180° Rota (Horizon)		C169CB 180° Rota (Vertical)	
CB-080 CB-085 CB-090 CB-095	CB-083 CB-087 CB-093 CB-097	CB-084 CB-088 CB-094 CB-098		CB-183 CB-185 CB-188	CB-194	CB-193 CB-195 CB-198

TWO DRAWER SIDE GANG LOCK D270CB



Application - Two drawer gang lock for locking two pedestal drawers with a single lock. Lock mounts on side of cabinet.


Operation - 180° key rotation, CCW to lock, key removable in both locked and unlocked positions.

Keying - Order lock plug separately, see page 2.

Packaging - Housing supplied with two C500DC-19 Drawer Clips. Case quantity 25.




GANG LOCKS

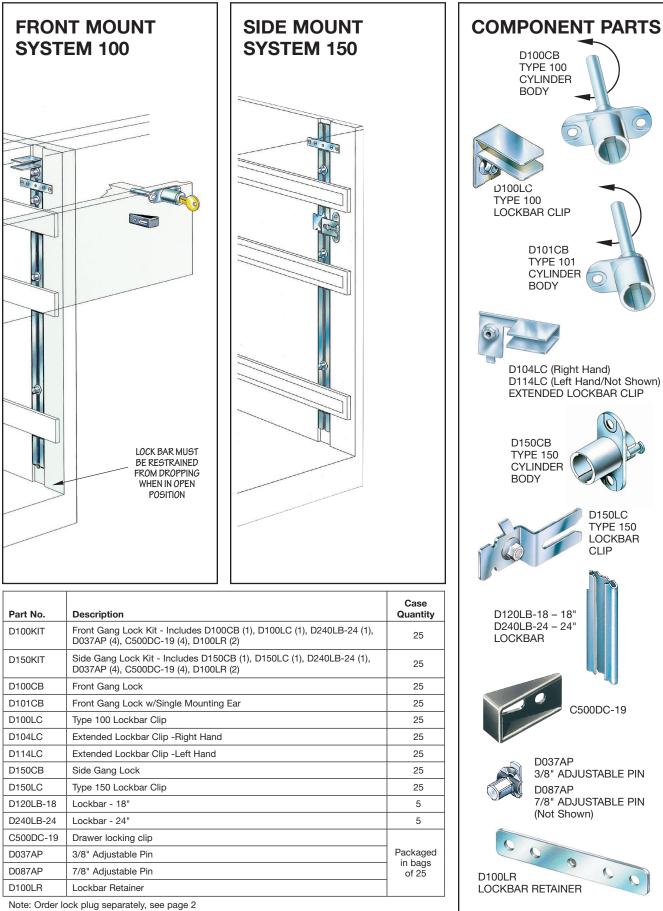

TIMBERLINE

DOUBLE DOOR LOCKS



Application - Surface mounted lock for locking two adjacent doors. Eliminates the need for a spring catch on the door opposite the lock. Works with either overlay or inset doors.

Operation - 180° cam rotation, CCW to lock, key removable in both locked and unlocked positions.

Keying - Order lock plug separately, see page 2.

Packaging - Supplied with two strike plates as shown. Housing is black, toughened nylon. Cylinder is unplated. Cams are zinc plated. Case quantity 25.

Part No.	Orientation		Top Cam Extension*				Case Quantity
C250CB	Normal (as shown)	3/16"	29/32"	3/32"	29/32"	1/2"	25
C251CB	Normal (as shown)	11/16"	1-17/32"	3/32"	29/32"	1/2"	25
C255CB	Opposite Mount	3/16"	29/32"	3/32"	29/32"	1/2"	25
C256CB	Opposite Mount	11/16"	1-17/32"	3/32"	29/32"	1/2"	25

* Measured from center of cylinder to tip of cam in unlocked position

PUSH LOCK C175CB


Application - For locking sliding, bypass type doors. Requires 3/4" hole in front door for cylinder.

Operation - Pushing in cylinder locks doors, with or without key. 45° key rotation allows cylinder to pop back out to unlock doors. Key removable in both locked and unlocked positions.

Keying - Order lock plug separately, see page 2.

Packaging - Supplied with nickel plated finish cup as shown. Housing is black, toughened nylon. Case quantity 25.



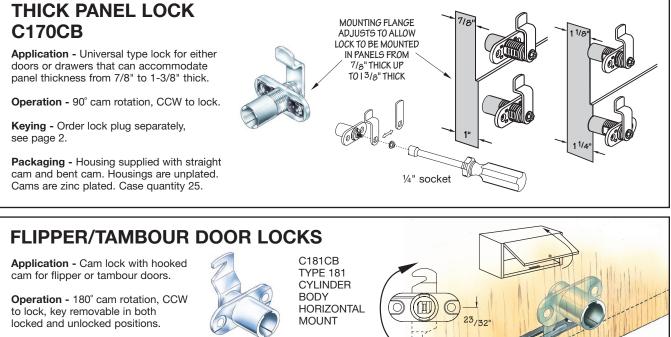

Keying - Order lock plug separately, see page 2.


Packaging - Supplied with C181SP-19 strike plate. Housings are unplated, cams are zinc plated. Case quantity 25.







C191CB **TYPE 191** CYLINDER BODY VERTICAL MOUNT





MISCELLANEOUS COMPONENTS

NEW! DOUBLE DOOR LATCH. ELIMINATE THE ELBOW CATCH.



Watch the Double Door Latch video at compx.com/ddl

Patented.

No need to reach inside cabinet to release elbow catch.

Application - Allows two or three point locking for standard or wardrobe double door cabinets.

Operation – Either door can be closed at anytime. Secures doors with deadbolt or cam locks.

Finish - Black (shown) or White.

Packaging – Kits contain one each: latch, activator and catch: also installation instructions


How to order:

1: Determine location of lock - right hand or left hand

2: Decide where latch is needed - top or bottom mount

3: Choose color - black or white

Lock Placement	Top Mount Kit	Bottom Mount Kit
Lock on	D200DL-BLK Black Finish	D300DL-BLK Black Finish
Right Door	D200DL-WHT White Finish	D300DL-WHT White Finish
Lock on	D300DL-BLK Black Finish	D200DL-BLK Black Finish
Left Door	D300DL-WHT White Finish	D200DL-WHT White Finish



recommended to use

both top and bottom

mount latches.

THREADED drawers. Kit will **BARREL CAM** LOCK KIT thickness 1/16" - 1/2". C143CB 1 23⁄/32" rotation CCW to lock. 1 1/4 13/16 separately, see page 2. nut, hex nut and spur 7/8" BEZE DIAMFTER


Application - Universal type lock for either doors or accommodate most locking applications for material

Operation - 90 degree cam

Keying – Order lock plugs

Packaging - Cylinder supplied with one straight cam, two bent cams, flange washer. Cylinder is black, cam plates are zinc plated.

Case quantity 25

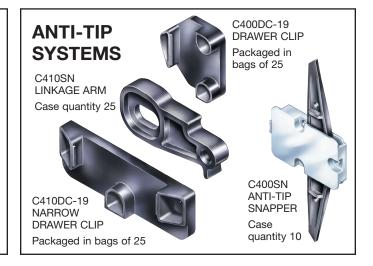


WARDROBE LOCK	S		
C260SP-19	Part No.	Description	Case Quantity
C480WB-50	C260CB	Wardrobe Lock, Vertical Mount	25
	C265CB	Wardrobe Lock Horizontal Mount (Not Shown)	25
	C480WB-50	Wardrobe Bar 50" Long	5
C260CB	C260SP-19	Wardrobe Bar Support	Bags of 25

D500AC DESK ACTUATOR Case quantity 10










864-297-6655 · compx.com

TOOLS & ACCESSORIES

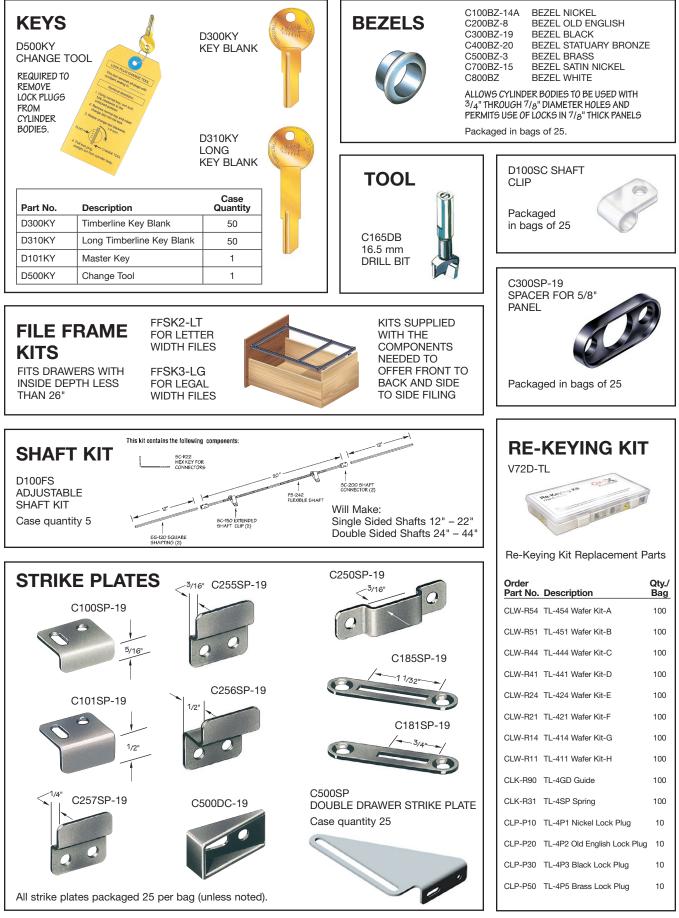

7







MAIN OFFICE - FACTORY

PO Box 200 Mauldin, SC 29662 PH: 864-297-6655 FAX: 864-297-9987 compx.com

WESTERN DISTRIBUTION CENTER

9370 Buffalo Avenue, Unit 104 Rancho Cucamonga, CA 91730 PH: 909-476-7933 FAX: 909-476-8553



Reorder #: F2644-004 November 2023 Printed in U.S.A. The products contained in this catalog are protected by the following patents: 1,331,036; 7,665,812; 8,516,864; 9,388,613

Copyright 2023 © CompX Security Products