

# Through your CompX Chicago distributor . . . a program to meet your lock requirements.

CompX Chicago manufactures a wide variety of locks for residential, commercial and industrial use. We've been solving security problems since the need for metal cabinet locks brought about the founding of our company in 1920.

The locks shown in this catalog are particularly wellsuited to serve the replacement market...as well as component manufacturers.

Our experience in serving this market has shown us the importance of product quality, competitive pricing, proper packaging and immediate service and delivery. Working through your CompX Chicago distributor, we offer a program that is committed to serving your needs.

### A complete selection of locks

- · Door and drawer locks for virtually every application, every security requirement
- Locking devices of every description for use in schools, institutional and commercial buildings
- · Key blanks and keying kits to complement each of our locks

### Packaged for your convenience

- · All hardware is individually packed in see-thru poly-bags for product protection and easy inspection
- · Poly-bags of like hardware are grouped in popular quantities and placed in handy cases
- · Case designed for convenience in storage and ease in handling
- · Cases are labeled for quick identification









ASSOCIATE MEMBER

# ASSOCIATE MEMBER

MEMBER



### A CUT ABOVE

The proven Ace II® original tubular lock, with its all brass construction and assembly process, provides professional locksmiths and their customers with excellent security at value prices.

# **HOW CABINET LOCKS ARE USED**

### DOOR APPLICATION

Bolt or cam at side locks to frame.






**LEFT HAND RIGHT HAND** 

At which edge of door hinges are located determines hand of door when facing door.

### SINGLE DRAWER APPLICATIONS

Drawer mounted lock - Bolt or cam locks on frame.




Frame mounted lock - Cam locks on back of drawer front with hook cam engaging strike.



### LID APPLICATION

Lock engages strike mounted on underside of lid.



### SLIDING (By-pass) DOOR **APPLICATION**

Lock engages strike mounted on rear door.



Celebrating 90 years of service to the security industry.



# The Family Of...





PO Box 200 Mauldin, SC 29662

Phone: 864-297-6655 Fax: 864-297-9987

E-Mail: national@compx.com

compx.com



715 Center Street Grayslake, IL 60030

Phone: 847-752-2500 Fax: 847-752-2419

E-Mail: fort@compx.com

compx.com



715 Center Street Grayslake, IL 60030

Phone: 847-752-2600 Fax: 847-752-2420

E-Mail: timberline@compx.com

compx.com



PO Box 200 Mauldin, SC 29662


Phone: 864-297-6655 Fax: 864-297-9987

E-Mail: chicago@compx.com

compx.com



# **TABLE OF CONTENTS**


































	Cam locks	
	Double bitted5	)
•	Single bitted 5	)
	Ace II tubular 6	`

Ace II Change-Matic ..... 7

•	Sliding door locks
	Ace II 7
	Single bitted 14

•	Steelcase replacement products
	Ace II

Screw type

	9
•	Display boards
	9

• File cabinet locks

٦	Γ-ŀ	nar	ndle	assem	blies
					10

T-handle locks	
Ace II Change-Matic System 64	. 7

)	Switch locks	
	Double bitted12,	13
	Ace II12,	13

•	Drawer locks	
	1	4

Special purpose locks

	15	
•	Service kits	
	16, 17	

Key b	olanks	
	18	

ACE I	key covers	
		19


١	١	E	)	í	а	ľ	t	ľ	1	E	)	r	•	(	3	(	0	١	V	(	Э	1	r	S	5								
																													-	1	C	)	

Specia	Ity strike	
		19


# **CAM LOCKS / DOUBLE & SINGLE BITTED**



- $\bullet$  Eleven criss-cross blade tumbler plug in  $^3/_4$  " diameter
- $\bullet$  Die cast barrel with two flats  $-\,^5/_8$  " across
- Key and cam rotation 90° from locked (12 O'Clock) to unlocked (3 O'Clock) position with keypull in locked position only
- Straight cam furnished is 1/8" thick X 3/4" wide
- · Polished Nickel finish
- Two keys per lock
- · Not available MK
- DK-45 key blank




Lock No.	"A" Dim.	"B" Dim.	"H" Dim.	"T" Dim.	KA Codes	KD Changes	Box Quantity
C3205	<sup>7</sup> / <sub>16</sub> "	11/8"	<sup>13</sup> / <sub>64</sub> "	<sup>15</sup> / <sub>64</sub> "	2001 2007	200	25
C3186	<sup>5</sup> /8"	11/8"	<sup>5</sup> / <sub>32</sub> "	<sup>13</sup> / <sub>32</sub> "	2001 2007	200	25
C1801	<sup>13</sup> / <sub>16</sub> "	11/8"	13/64"	11/16"	2001	_	25
C1802	11/16"	11/8"	<sup>13</sup> / <sub>64</sub> "	<sup>15</sup> /16"	2001 2007	_	25
1803 DK-4 keyway only	13/16"	11/8"	<sup>13</sup> / <sub>64</sub> "	17/64"	2141	200	each
C1804	11/2"	11/8"	<sup>13</sup> / <sub>64</sub> "	113/32"	2001	_	25







- Five disc tumbler plug in 3/4" diameter
- $\bullet$  Die cast barrel with two flats -5/8" across
- Key and cam rotation 90° from locked (12 0'Clock) to unlocked (3 0'Clock) position with keypull in locked position only
- Straight cam furnished is 1/8" thick X 3/4" wide
- · Polished Nickel finish
- Two keys per lock
- Available in six disc tumbler
- DK-5 key blank



Lock No.	"A" Dim.	"B" Dim.	"H" Dim.	"T" Dim.	KA Codes	KD Changes	Box Quantity
3705	<sup>7</sup> / <sub>16</sub> "	11/8"	1/4"	<sup>13</sup> / <sub>64</sub> "	1289 1454	200	each
C3786	5/8"	11/8"	<sup>13</sup> / <sub>64</sub> "	13/32"	1289 1454	200	25
C1701	<sup>13</sup> / <sub>16</sub> "	11/8"	<sup>13</sup> / <sub>64</sub> "	<sup>11</sup> /16"	1289 1454	200	25
C1702	11/16"	11/8"	<sup>13</sup> / <sub>64</sub> "	<sup>15</sup> /16"	1454	200	25
C1703	13/16"	11/8"	<sup>13</sup> / <sub>64</sub> "	17/64"	1289 1454	200	25
C1704	11/2"	11/8"	<sup>13</sup> / <sub>64</sub> "	113/32"	1289 1454	200	25




# **ACE II® CAM TYPE UNIVERSAL FUNCTION LOCKS**



### **Conveniently Packaged!**


- Effective Retail Display—packages include easy to follow instructions for replacement lock needs
- Convenient Field Use—The Universal Function package includes everything you need for quick, easy installation
- All brass construction
- Ace II® assembly
- . Center plug contains anti-drill pin for added security
- Polished Nickel finish
- Furnished with straight locking cams which can be mounted vertically or horizontally and also a  $^1/_4$ " offset cam. Cams are  $^1/_8$ " thick X  $^3/_4$ " wide
- · Two keys per lock
- D137-CLC key blank




### **Specifications:**


**KEY ROTATION/REMOVAL** is determined by the **STOP CAM** selected and how it is positioned

- A. 180° Clockwise Rotation -Key removal at 12 O'Clock
- B. 180° Counter Clockwise Rotation-Key removal at 12 O'Clock
- C. 90° Clockwise Rotation -Key removal at 12 & 3 O'Clock
- D. 90° Counter Clockwise Rotation -Key removal at 12 & 9 O'Clock

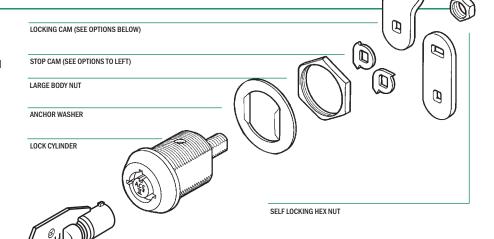










Lock No.	"B" Dim.	"C" Dim.	"D" Dim.	KA Codes	KD Changes	Box Quantity
C4198	1 <sup>1</sup> / <sub>8</sub> 28.6mm	<sup>23</sup> / <sub>64</sub> 9.04mm	<sup>19</sup> / <sub>32</sub> 15.1mm	6224 6225 7302	200	25
C4153	1 <sup>1</sup> / <sub>8</sub> 28.6mm	1/ <sub>4</sub> 6.4mm	11/ <sub>16</sub> 17.5mm	6032 6234 7302 7525 PL-505 PL910	200	25
C4152*	1 <sup>1</sup> / <sub>8</sub> 28.6mm	13/ <sub>64</sub> 5.2mm	<sup>15</sup> / <sub>16</sub> 23.8mm	7302 PL-505 PL910	200	25
C4160*	1 <sup>1</sup> / <sub>8</sub> 28.6mm	<sup>13</sup> / <sub>64</sub> 5.2mm	1 <sup>3</sup> / <sub>32</sub> 27.8mm	6234 6502 7302 PL-505	200	25

<sup>\*</sup> Available in master keying



# **ACE II® CHANGE-MATIC®**






# ROUTE MANAGEMENT SYSTEM FEATURING ACE II CHANGE-MATIC - CHANGE CODES UP TO EIGHT TIMES WITH THE SAME LOCK

- . Change combination in seconds
- Each operating key is matched to one of eight different tumbler combinations
- Order ACE Change-Matic with operating keys for all eight combinations or order fewer combinations
- No outward indication of combination being used
- The Change key shifts from current combination to a new one without regard to sequence – change key will not operate the lock

- . Brass locking bolt for added security
- All brass inner cylinder and components
- Variety of cam styles to fit most application (5502)
- Special order







# **ACE II<sup>®</sup> SCREW TYPE LOCKS**

### **ACE II® SEVEN PIN TUMBLER SCREW TYPE**




- Ace II<sup>®</sup> lock assembly in <sup>3</sup>/<sub>4</sub>" diameter
- Barrel with two flats 5/8" across
- 360° key rotation with keypull every 180° (12 and 6 O'Clock)
- · Two keys per lock
- · Includes body nut
- Additional stud lengths available to special order; minimum order and extended lead time may apply
- D137-CLC key blank

					43/64
Lock No.	"A" Dim.	KA Codes	KD Changes	Box Quantity	
CSA4107	71/32"	7341	200	10	

# 10 1/8 HRD

# **ACE II® SLIDING DOOR LOCKS**

- ACE II® cylinder can be keyed compatibly with other ACE II® models
- Solid die cast housing and locking pin
- · Retrofits most existing sliding door locks
- Easy cylinder removal for replacement or rekeying
- Available keyed alike, keyed different and keyed in groups
- · Bright chrome finish
- Two keys per lock
- D137-CLC key blank






Lock No.	KA Codes	KD	Box Quantity
C5170	6303 7302	200	10





# **DOUBLE BITTED SCREW TYPE LOCKS**











- Eleven crisscross disc tumblers
- Key removable every 90°
- Unique operation of tumblers provide better operation in unfavorable weather conditions
- Bright nickel finish

- Over 200 key combination with DK-4 blank
- Supplied with two keys and mounting hardware
- Special order



2625

# STEELCASE® REPLACEMENT PLUGS

# STEELCASE® REPLACEMENT PLUGS



**Complete Plug Assembly** P1076-Series



**Plug-Sub Assembly** CP1076-Series (Retaining Tumbler Only)

Take advantage of a large replacement market. Millions of Steelcase desk locks are now in use!

# FR/XF KEY CODES

- Direct replacement for Steelcase original equipment
- · Loaded plug with two keys; key code stamped on face
- · Available in satin nickel finish and black finish
- . Retrofits in seconds with the use of the removal tool
- · 6 disc tumbler construction easily rekeyable with Service Kit
- Set up your own code systems for each customer with the CP-1076-90

Lock No.	Description	Keyway	KD Changes	Box Quantity
P-1076	Loaded Plug w/2 Keys	K101-K104 (Specify Keyway K101-K104 or our choice)	150	each
CP-1076-90	Un-Loaded Plug (No Keys / Retainer Tumbler only)	K101-K104		each
K-100 RK68	Removal Tool			each


Steelcase is a registered trademark of Steelcase, Inc., Grand Rapids, Michigan.




# **FILE CABINET LOCKS**



- Four pin tumbler plug
- Die cast barrel with die cast bolt
- 5002LP has rectangular bolt
- · Other models have round bolt
- Satin Chrome finish
- Two keys per lock



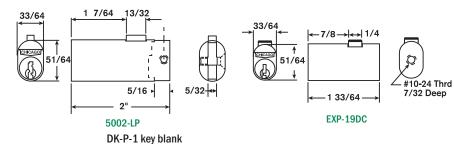

Lock No.	"A" Dim.	"Bolt" Dim.	"D" Dim.	"O.A." Dim.	"W" Dim.	KA Codes	KD Changes	Box Quantity
C5001LP	<sup>55</sup> / <sub>64</sub> "	<sup>9</sup> / <sub>32</sub> "dia.	<sup>5</sup> / <sub>16</sub> "	13/4"	<sup>5</sup> / <sub>32</sub> "	1X03 3X5	200	10
C5002LP*	17/64"	<sup>27</sup> / <sub>64</sub> " <sub>x</sub> <sup>9</sup> / <sub>64</sub> "	<sup>5</sup> /16"	2"	5/32"	1X04 2X01 1X20 2X02	200	10
CEXP-19DC	7/8"	<sup>1</sup> / <sub>4</sub> "dia.	NA	133/64"	NA	5X75	200	10

<sup>\*</sup> To order replacement locks for Steelcase equipment, specify 5002LP, KA# CL-S100 Steelcase is a registered trademark of Steelcase, Inc., Grand Rapids, Michigan.

# **SAMPLE BOARDS**


### **ACE II TUBULAR LOCKS**



### **V69B-19 BOARD**

V69B-19 Board displays Ace tubular cam locks, C4153 - C4198, C4235-DC switch lock, C4073 series switch locks, C5170 showcase lock, C4260-19 cylinder lock, C425519RL T-handle Cylinder, CSA4107 screw type lock.

# FILE LOCKS, SINGLE AND DOUBLE BITTED LOCKS



### **V69B-20 BOARD**

V69B-20 Board displays C5001LP, C5002LP & CEXP-19DC file cabinet locks, C1974 & C1975 bolt locks, C17256TNH six tumbler drawer lock, C3786 single bitted cam lock, C1770 single bitted sliding door lock, C1802 & C3186 double bitted cam locks, C2174 series & C3535BDC switch locks, C1968 drawer lock.


# "T" HANDLE ASSEMBLIES



Handle and Cylinder dimensions do not conform to NAMA dimensional standards


### **For Limited Spaces**


- Accepts Ace II<sup>®</sup> cylinder No. 4260-19; see page 11
- To use flat key cylinder No. P-1060-19, order "T" Handle No. OU-4260-6T
- · Available with 4260-19 or P-1060-19 cylinders only
- · Chrome finish
- Supplied with straight cam (B = 11/2")



### New! 4200 Series Retrofits OU-4260 & OU-5560 "T" Handles

- · Increased security for limited spaces
- · Accepts standard & long cylinder locks which meet NAMA dimensional standards
- Available in <sup>1</sup>/<sub>4</sub> turn, clockwise or counter-clockwise
- Locking cams can be manufactured per customer requirement, cam not included
- Available 90° or 180° rotation
- · Chrome textured finish for scratch resistance
- · Black finish available; minimum order may apply

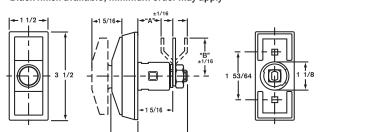



0U-4200-NA


### **STANDARD SCREW TYPE**

# OU-4265-NA

All "T" Handles with suffix NA will accept cylinders which meet NAMA dimensional standards

### **Easily Tighten Door Without Losing Seal**

- When fully extended, handle is free wheeling to 360°
   When partially depressed, handle is free wheeling to 120°
- $\bullet$  Furnished with  $^1/_2$  x 13 threaded stud
- Front design has built up flange and tapered "T" Handle construction
- · Accepts standard & long cylinders which meet NAMA dimensional standards
- Chrome textured finish for scratch resistance
- Customer must specify "A" Dimension
- Minimum order may apply for non-standard stud lengths
- · Optional stainless steel handle available



NOTE:
When ordering
T-Handles specify
all information
for proper stud




# "T" HANDLE CYLINDER LOCKS




- Ace II® 7 Pin tumbler lock
- . Brass locking bolt
- Meets NAMA dimensional standards when used with "T" handles 0U-4200-NA or OU-4265-NA; see page 10
- · Chrome finish
- · Two keys per lock
- For application options, see page 10
- D137-CLC key blank








- Ace II® 7 Pin tumbler lock
- Works with OU-4260 "T" handle only; see page 10
- · Brass locking pin
- Chrome finish
- Two keys per lock
- D137-CLC key blank





- For use in OU-4260-6T "T" handle only; see page 10
- · 6 disc tumblers
- Over 200 key combinations available
- Two keys per lock
- · Master keying available
- DK-101-H key blank
- · Special order





Lock No.	KA Codes	KD Changes	Box Quantity
C425519RL	SP802 SP803 SP804 L463	200	10
C4260-19	L463	200	10
P-1060-19	_	200	_

# **CODE CHANGEABLE**





# Complete route management system featuring **System 64** - change codes up to 64 times with the same lock

- Add codes as needed no need to purchase keys for all 64 codes at one time
- System 64 locks conform to NAMA specifications and are available in spring and dead bolt versions

## System 64 Security

- All key codes are exclusively assigned and are registered on confidential signature cards
- All keys are shipped separately from locks; CompX does not supply or sell key blanks for duplication

- · Solid steel construction with brass components
- Unique key design and manufactured with cold drawn steel, which significantly reduces wear
- Tumblers and driving pins are arranged specially to defeat picking and manipulation
- Steel outer barrel, stainless steel plug and brass components provide superb corrosion resistance for most applications
- Special order contact CompX for more info


PROBLEM	BEST SOLUTION	
Keys are lost by employees	System 64 locks can be set to new code without removing the lock; no need to order new locks/keys	
Vending machines are moved between routes	System 64 makes it easy to change and update route codes as needed	
Supervisors need to access vending machines on several routes	System 64 allows supervisors to carry only the keys they need	
Service personnel has to maintain and repair vending machines brought in from other routes	The service shop has access to all vending machines with System 64 route management locks	

# **SWITCH LOCKS**

### **SINGLE POLE, SINGLE THROW**



C4073 SERIES



### Ace II® Lock Assembly


- Maintaining contact switch operated by manually rotating inserted key 90° clockwise from open to closed position
- Momentary contact switch locks feature spring return from closed to open position after 90° clockwise key rotation to closed position
- . Contact configuration: SPST
- 7 amps @ 28 VAC/VDC
- Electrical Life: 6,000 cycles @ Max. Load
- Contact Resistance: 50 milli ohms initial maximum
- Bright Chrome finish
- · Two keys per lock
- Master Keying not available
- D137-CLC key blank

Lock No.	Keypull	Contact	KA Codes	KD Changes	Box Quantity
C4073-1DC	OFF Only	Maintaining	PL927	200	10
C4073-2DC	OFF & ON	Maintaining	PL910	200	10
C4073-70DC	OFF Only	Momentary	PL927	200	10

Warning: Improper connection to circuitry may result in shock. Since CompX Chicago does not control the use of its products, external wiring, switch lock selection, and/or use is not the responsibility of CompX Security Products.

### **SINGLE POLE, SINGLE THROW**







# Double Bitted Assembly With Eleven Criss-Cross Blade Tumblers

- · Lock operation same as 4073 Series
- Contact configuration: SPST
- 7 amps @ 28 VAC/VDC
- Electrical Life: 6,000 cycles @ Max. Load
- · Contact Resistance: 50 milli ohms initial maximum
- . Bright Chrome Finish
- Two keys per lock
- Master Keying not available
- . DK-4 key blank

Lock No.	Keypull	Contact	KA Codes	KD Changes	Box Quantity
C2174-1DC	OFF Only	Maintaining	2001 2007	200	10
C2174-2DC	OFF & ON	Maintaining	2001 2007 2387	200	10
C2174-70DC	OFF Only	Momentary	2001 2007 2126	200	10

Warning: Improper connection to circuitry may result in shock. Since CompX Chicago does not control the use of its products, external wiring, switch lock selection, and/or use is not the responsibility of CompX Security Products.



# **SWITCH LOCKS**

### **SINGLE POLE, DOUBLE THROW**

4235 Series: Ace II® Lock Assembly

**3535 Series:** 

**Double Bitted Assembly With Eleven Criss-Cross Blade Tumblers** 


These features apply to both switch locks:

- 7 amps resistive/4 amps inductive @ 115 VAC or 28 VDC
- Reliable snap action switch provides many thousands of electrical contacts without failure
- Terminals designed to accept "AMP" .058 pin receptacles
- Bright Chrome finish
- Furnished with 10 inch, 20 gage stranded wire
- · Two keys per lock
- Master Keying not available
- . Maintaining only
- Switches are U.L. recognized & CSA listed
- D137-CLC key blank for tubular
- DK-4 key blank for double bit lock

Contact factory for additional specifications.






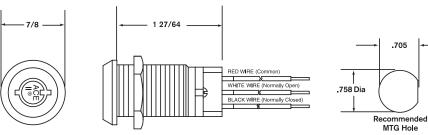

Ace II® Switch Locks — SPDT

Lock No.	Keypull	Rotation	KA Codes	KD Changes	Box Quantity
c4235-DC	2 positions	180° CW	CLC705	200	10
4235BDC	1 position	165° CW	CLC706	200	each

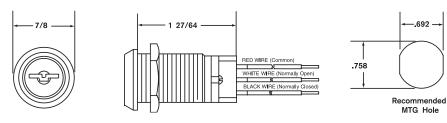

Double Bitted Switch Locks — SPDT

Lock No.	Keypull	Rotation	KA Codes	KD Changes	Box Quantity
3535DDC	2 positions	180° CW	2387	200	each
C3535-BDC	1 position	165° CW	2382	200	10

Warning: Improper connection to circuitry may result in shock. Since CompX Chicago does not control the use of its products, external wiring, switch lock selection, and/or use is not the responsibility of CompX Security Products.



# DRAWER LOCKS / SLIDING DOOR LOCKS

### **DEAD BOLT TYPE**





- · Five disc tumbler
- Removable plug feature
- Steel locking bolt
- Two keys per lock
- DK-5 key blank




Lock No.	"A" Dim.	"D" Dim.	KA Codes	KD Changes	Box Quantity
C1968	<sup>57</sup> / <sub>64</sub> " 22.6mm	1 <sup>5</sup> / <sub>32</sub> " 29.6mm	1289 1454	200	25
C1974	<sup>19</sup> / <sub>32</sub> " 15.1mm	<sup>27</sup> / <sub>32</sub> " 21.4mm	1289 1454	200	25
C1975	<sup>21</sup> / <sub>32</sub> " 16.7mm	<sup>57</sup> / <sub>64</sub> " <b>22.6mm</b>	1289 1454	200	25








**Brushed Brass** 






Satin Chrome

### **SLIDING DOOR LOCK**



- Five disc tumbler plug in 7/8" diameter
- · Die cast barrel
- C1770 utilizes a spring bolt which locks by pushing the cylinder in and released by turning the key 90° from locked (12 O'Clock) to unlocked (3 O'Clock) position
- · Keypull in locked and unlocked positions
- · Satin Chrome finish
- Mounting plate is  $^5/_{64}$ " X  $^7/_{8}$ " X 2" with  $1^1/_2$ " between mounting hole centers
- Two keys per lock
- DK-5 key blank

Lock No.	KA Codes	KD Changes	Box Quantity
C1770	1289 1454	200	10






# SPECIAL PURPOSE LOCKS



# **KeyLOC™ – The tamper evident key ring from CompX Chicago**


- Vinyl coated steel cables the same used in the aircraft industry – resistant to cutting; if cut, cable is non-repairable
- Cables are available in 3 sizes: 4", 6" and 9" loops; key ring loops hold 10 to 50 keys
- Retainer pins fit securely into ACE II® cylinder nested in lightweight aluminum housing tampering of any kind is revealed immediately
- Security ring clearly warns
   "DO NOT DUPLICATE"
- Easy 1/4 turn cable installation
- All units supplied with 2 keys each; includes security seal
- · Scratch resistant vinyl cover included



Lock No.	KA Codes	KD Changes	Box Quantity
C4201 4", 6" & 9" Cable Assembly	6201	200	1
C4201-4 4" Cable Assembly	6201 6230 6255	200	5
C4201-6 6" Cable Assembly	6201 6230 6255	200	5
C4201-9 9" Cable Assembly	6201	200	1
C4201-LC  Locking Cylinder only	6201 6230 6248 6255	200	1
4201-5A	4" cable only		each
4201-5B	6" cable only		each
4201-5C	9" cable only		each
D137-CLC	ACE II° key blank		50

### **DRAWER & DOOR**

- Six disc tumbler plug in 3/4" diameter
- Die cast barrel with two flats  $-\frac{21}{32}$ " across
- Key and cam rotation 90° from locked (12 O'Clock) to unlocked (3 O'Clock) position with keypull in both positions
- This lock designed to be used with customer's latching mechanism
- · Satin Nickel finish
- Two keys per lock
- DK-101-H key blank





Lock No.	KA Codes	KD Changes	Box Quantity
C17256TNH	1101X	150	25



# **ACE II® SERVICE KITS**

# Ace® Factory Original Parts now in Convenient Service Kits for Locksmiths!

**Ace® Locking Cam and Tumbler** Service Kits from CompX Chicago save invaluable time!


They provide ALL the parts needed to service locks in one compact container. No more wasted trips back to the shop to find forgotten tumblers, springs... it's all right at your fingertips.

Single and Double Bitted Service Kits also available (see page 17). Contact your local distributor to order and save both time and money!



Ace® Locking Cams Service Kit

Part No. D9629

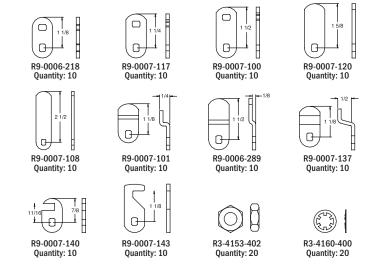

R5-0029-552


Quantity: 20



**Ace® Tumbler Service Kit** 

Part No. D9630

Quantity: 200 pieces per compartment, unless otherwise marked




M5-3000-403

Quantity: 10



Assembly Pin 22-42-HY 20273



Note: Cams are 3/4" wide by 1/8" thick.



Depth Key 43010-420 Quantity: 1



# **SINGLE / DOUBLE BITTED SERVICE KITS**



Single Bitted Service Kit - Part No. D9094



#1 - 41043

#2 - 41050

#3 - 41065 #4 - 41076

#5 - 41087



#M13 41094





Quantity: 50

41091

Crescent Spring

37193



Quantity:

#M51 41092

41096



#M31

41095

Quantity:



41093



Crescent Ring

37512

Quantity:



Hex Nut 40174



Tumbler Assemblies Standard - 43445

Off Center

Left - 43446

Right - 43443 K4W - 43447 Quantity: 5 each

**Tumbler Spring** 

37646

Cam Nut 47753

Quantity:

**Retaining Clip** 22058

**Double Bitted** 

Tumblers

41098

Quantity: 220





**Tumbler Springs** 40461 Quantity: 20



Kevblanks K4S - 83001 K4L - 83002 K4R - 83003 Quantity: 10 each



Flat Washer (3/4 I.D.) 41307 Quantity: 10

Hex Nut

40174

Quantity: 10



Lock Washer (1/2 I.D.) 27447 Quantity: 10





Crescent Spring 37193 Quantity: 50



Cam Nut 47753 Quantity: 10



Retaining Clip 22058 Quantity: 10



Double Bitted Service Kit - Part No. D9095

### **Replacement Parts for Service Kits**

Part No.	Description	Std. Pkg.
6-165	Ace Cam	10
7-67	Ace Cam	10
7-45	Ace Cam	10
7-101	Ace Cam	10
7-13	Ace Cam	10
7-192	Ace Cam	10
7-209	Ace Cam	10
7-240	Ace Cam	10
7-50	Ace Cam	10
2059-44	Mounting Washer	25
29-17	Cam Adaptor	25

### **GUIDE KEY SET**

K4W Keyblanks

Quantity: 10

Crescent Ring

37512

Quantity: 50

### 402 Cut Kevs

- Numbered from 2001 to 2576, but not in consecutive order; 2400 Series is not included
- Order item #D9402

### KF Series Cut Keys

• Cut Keys for KF series only



# **CompX Chicago KEYBLANKS**

Genuine CompX Chicago key blanks are packed 50 per box. Order in multiples of 50.



DK-4-L Off Center Left



DK-4 Center Groove



DK-4-R Off Center Right



DK-4-W "W" Milling




DK-2-W "W" Milling



DK-2 Center Groove



DK-18 Thicker Blank




DK-103-G 6-Tumbler




DK-501 5-Tumbler



DK-502 5-Tumbler



DK-503 5-Tumbler



DK-504 5-Tumbler



DK-5 5-Tumbler



DK-9 5-Tumbler




DK-35 5-Tumbler



DK-35-M 5-Tumbler



Part number DK-38 (5-Tumbler) is obsolete. No replacement parts available.



DK-39 5-Tumbler



DK-P-1 4-Pin Tumbler



DK-P-2 4-Pin Tumbler




DK-P-3 4-Pin Tumbler



DK-P-9 4-Pin Tumbler



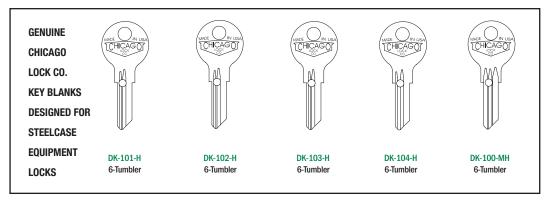

 $Steel case is a \textit{registered trademark of Steel case}, Inc., Grand \, Rapids, \, Michigan. \, \\$ 



# **ACE KEY COVERS / WEATHER COVERS**

### **ACE® KEY COVERS**



# Available in a large range of colors, these user friendly Ace II® Key Handle Covers from CompX Chicago make key management easy.


Key Handle Covers are made of a durable, strong plastic that press-fit any ACE  $II^{\otimes}$  key. The larger size allows for better grip and overall control of the key.

Product No. Specified By Color (Sold in packages of five.)

### Available in the following colors:

Light Blue	Purple	Yellow	Tan	Blue
D9645	D9651	D9646	D9652	D9650
Green	Brown	White	Orange	Rust
D9648	D9654	D9649	D9647	D9653

### **WEATHER COVERS**




Dust Cap No. D9655-WC (Sold in packages of five.)


# Protect Switch Locks and Cam Locks from the elements with this economical, easy to install weather cover

Quality construction includes:


- · Chrome plated zinc die cast cover
- . Stainless Steel mounting ring
- · Permanently installed rubber seal
- Positive spring closure to ensure seal integrity
- Inside dimension: .755"

Competitively priced, and in stock for immediate shipment





# **SPECIALTY STRIKE**



Lock No.	Description	Box Quantity
C500SP	Designed to lock file and box drawers when no other locking points are available.	25







# **MAIN OFFICE - FACTORY**

REGISTERED TO ISO 9001 CERTIFICATE NO. 10000456

PO Box 200 Mauldin, SC 29662 PH: 864-297-6655 FAX: 864-297-9987

compx.com

### **WESTERN DISTRIBUTION CENTER**

9370 Buffalo Avenue, Unit 104 Rancho Cucamonga, CA 91730

PH: 909-476-7933 FAX: 909-476-8553

Reorder #: F2644-002 July 2023 Printed in the USA

Copyright 2023 © CompX Security Products



COMPX NATIONAL
REGISTERED TO ISO 9001: 2015
CERTIFICATE NO. 10000456 OM15

